




RIVKLE® B2007

The RIVKLE® Battery tool

BOLLHOFF

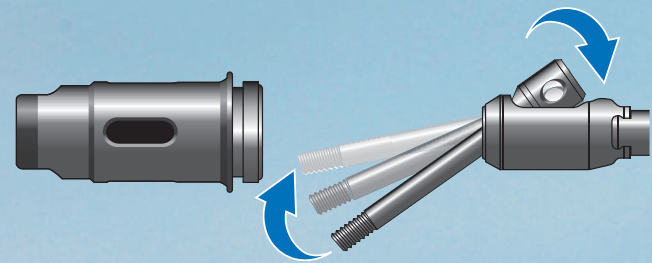

New quick tooling replacement

- No tool needed
- Uses the existing mandrel & anvil

Standard BÖLLHOFF ergonomic

- Single press trigger function to complete the entire cycle
- Comfortable & ergonomic handling

Advantages:

- 3 kN to 22 kN (M3-M10 steel)
- 24 RIVKLE® / min
- Up to 800 cycles with 1 battery
- Internal qualification done with 1 000 000 cycles
- BÖLLHOFF quality
- RIVKLE® nut & stud compatible
- Li-Ion technology battery



YouTube RIVKLE B2007



Electro-hydraulic technology

- Well balanced
- Power & reliability in a reasonable weight

Soft coverings for comfortable handling and for tool protection

LCD screen

- Load adjustment
- Setting parameters menu
- Battery level information



- Unscrewing button

RIVKLE® B2007 – Cordless battery tool for RIVKLE® nut & studs

Built for intensive use

- Electro-hydraulic technology: the choice for ultimate performance with the best reliability whilst maintaining a reasonable weight
- Produces 600 to 800 cycles per battery
- 1 000 000 cycles qualification – BÖLLHOFF quality

Optimized ergonomic design

- Comparable weight to the P2007 when fitted with hose

B2007 	Tool	+	Tooling	+	Battery	Total weight
	2,12	+	0,07	+	0,30	2,49 kg
P2007  Pneumatic	Tool	+	Tooling	+	Pneumatic	Total weight
	2,20	+	0,07	+	0,33	2,60 kg

- Well balanced tool
- Smart lighting to see in dark conditions




- Precise force adjustment, easy to do from the screen (possibility to lock it in the menu)
- Full menu to personalize your tool to your wish

Main characteristics

Setting force range kN	RIVKLE® capacity	Setting stroke max	Cadency RIVKLE®/min	Weight (Tool + Tooling + Battery) kg
3 → 22*	Steel: M3 → M10* Stainless steel: M3 → M8*	7 mm	24	2,49

* Above 18 kN (M10 steel & M8 Stainless steel) please use fork adaptator & specific tooling

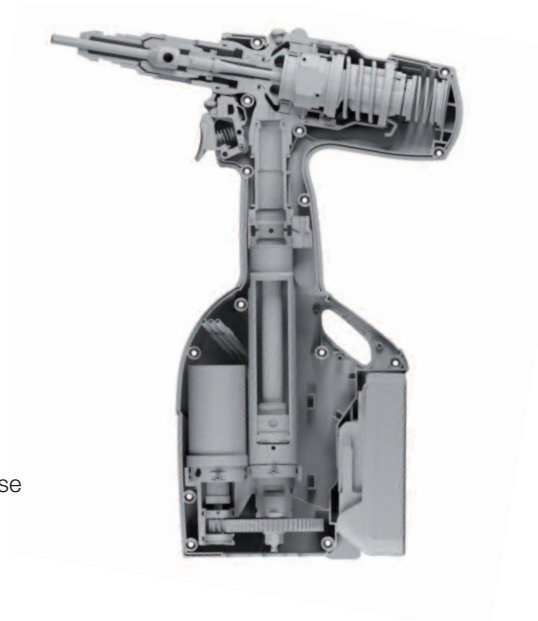

Well balanced

RIVKLE® B2007




	Connection made for Europe 	Connection made for US 
Package with 1 battery	236 166 01 000	236 168 01 000
Package with 2 batteries	236 167 01 000	236 169 01 000

Tooling

				3 → 18 kN					18 → 22 kN	
				M3	M4	M5	M6	M8	M8	M10
Mandrel			236 113 XX 020	03	04	05	06	08	236 913 08 110	236 913 10 019
			376 113 XX 020	–	04	05	06	08	–	
Anvil			236 113 XX 030	03	04	05	06	08	08	10
			376 113 XX 030	–	04	05	06	08	–	
Fork and nose for studs & force >18 kN (M8 & M10)			236 166 00 303 236 166 00 304						X	X
 Tooling box	 + 		236 113 00 002	X	X	X	X	X	–	

ex: to set M10 RIVKLE® nut, please order the specific nose + fork + mandrel + anvil,
so 236 166 00 303 + 236 166 00 304 + 236 113 10 019 + 236 113 10 030

Accessories

Accessorie	Code	Accessorie	Code
 Original battery 14,4V 2,6AH - Li-Ion	282 590 30 350	 Tool support	236 166 00 308
 Original charger	EU: 282 590 30 352 US: 282 590 30 353	Screw kit adaptator	See general RIVKLE® catalogue 
 Battery with higher capacity 14,4V 4,0AH - Li-Ion	282 590 30 351	 Cord power supply	EU: 282 590 30 356 US: 282 590 30 357
 Multicharger 4 positions	EU: 282 590 30 354 US: 282 590 30 355		

Böllhoff International with companies in:

Argentina
Austria
Brazil
Canada
China
Czech Republic
France
Germany
Hungary
India
Italy
Japan
Mexico
Poland
Romania
Russia
Slovakia
South Korea
Spain
Switzerland
Thailand
Turkey
United Kingdom
USA

Apart from these 24 countries, Böllhoff supports its international customers in other important industrial markets in close partnership with agents and dealers.

Böllhoff Group
Please find your local contact on www.boellhoff.com
or contact us under fasteningtechnology@boellhoff.com

